


CVX/CSX explosion proof bells are listed for service in Division One applications, which means they are designed to operate safely in atmospheres that actually contain the explosive elements in free form.

Available features and options:

- Color: Red or Gray
- Mounting: Wall
- Available in 10" size
- Indoor and outdoor models
- 24 VDC and 115 VAC models
- Single stroke and vibrating
- Approvals: UL, CSFM, MEA

Series CVX

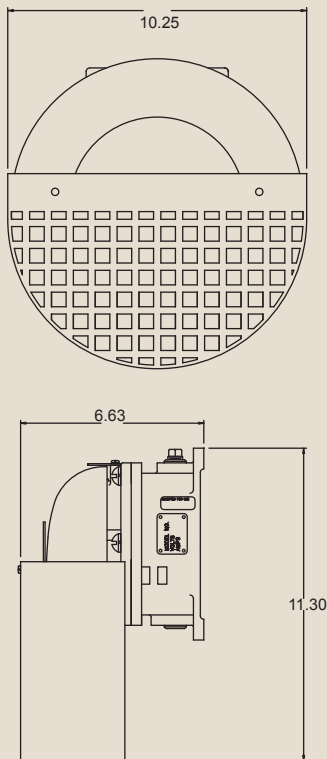

Please reference the back of this catalog for more information on mounting options.

Vibrating Bell Models



Indoor		Order Code
CVX10-115-R	Red	3742
CVX10-115-S	Gray	0132
Outdoor		Order Code
CVXG10-115-R	Red	4930
CVXG10-115-S	Gray	0134

Input Current	115 VAC	dBA @ 10 ft.
	0.220	90

Mounting Options: All models include integral cast backbox for surface mounting with 1/2" threaded conduit entrances on top and bottom of housing.

Single Stroke Models



Indoor		Order Code
CSX10-115-R	Red	4715
CSX10-115-S	Gray	0166
Outdoor		Order Code
CSXG10-115-R	Red	4929
CSXG10-115-S	Gray	0167
Indoor		Order Code
CSX10-24-R	Red	3582
CSX10-24-S	Gray	0164
Outdoor		Order Code
CSXG10-24-R	Red	3402
CSXG10-24-S	Gray	0196

Input Current	24 VDC	115 VAC	dBA @ 10 ft.
	0.500	0.125	87

Class	Group	Contents of Hazardous Atmosphere
I	B	Hydrogen, or gases and vapors of equivalent hazards such as manufactured gas
I	C	Ethyl and ether vapors
II	D	Gasoline, petroleum, naphtha, alcohol, acetone, benzene, lacquer solvent, vapors, natural gas
II	F	Carbon black, coal, coke dust
II	G	Flour, starch, grain dusts