

8" Ceiling Mount



	Color	Order Code
15/30/75/95cd S8-24MCC-FW	White	0054
115/177cd S8-24MCCH-FW	White	0056
S8-70/25	White	0052

UL Max. Current	15cd	30cd	75cd	110cd
24 VDC	0.065	0.105	0.189	0.249

UL Max. Current	135cd	185cd
24 VDC	0.300	0.420

Mounting Options: CBB-8 Speaker Back Box (3314)
SSB-8 Speaker Support Bridge (3573)

UL Reverberant dBA @ 10 Feet							
Watts	1/8	1/4	1/2	1	2	4	8
	75	78	81	84	87	90	93

8" ceiling speaker available in three configurations and UL Listed under Standard 1480. Use with the SP40S Supervised Multi-function Communications System.

Available features and options:

Color: White


Metal Grille

Mounting: Ceiling

Strobe Synchronization

Approvals: UL Standard 1480, CSFM, MEA

Series S

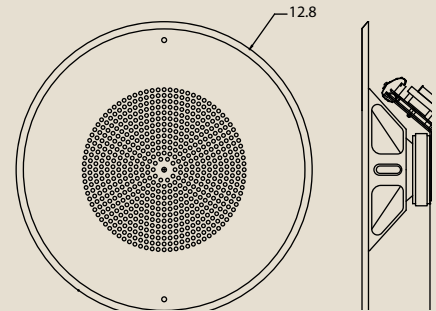

Please reference the back of this catalog for more information on mounting options.